

2026/08/18

SteelEquivalents.com


08X15H5Д2ТУ-ВД

08Kh15N5D2TU

7

1

9	17
---	----

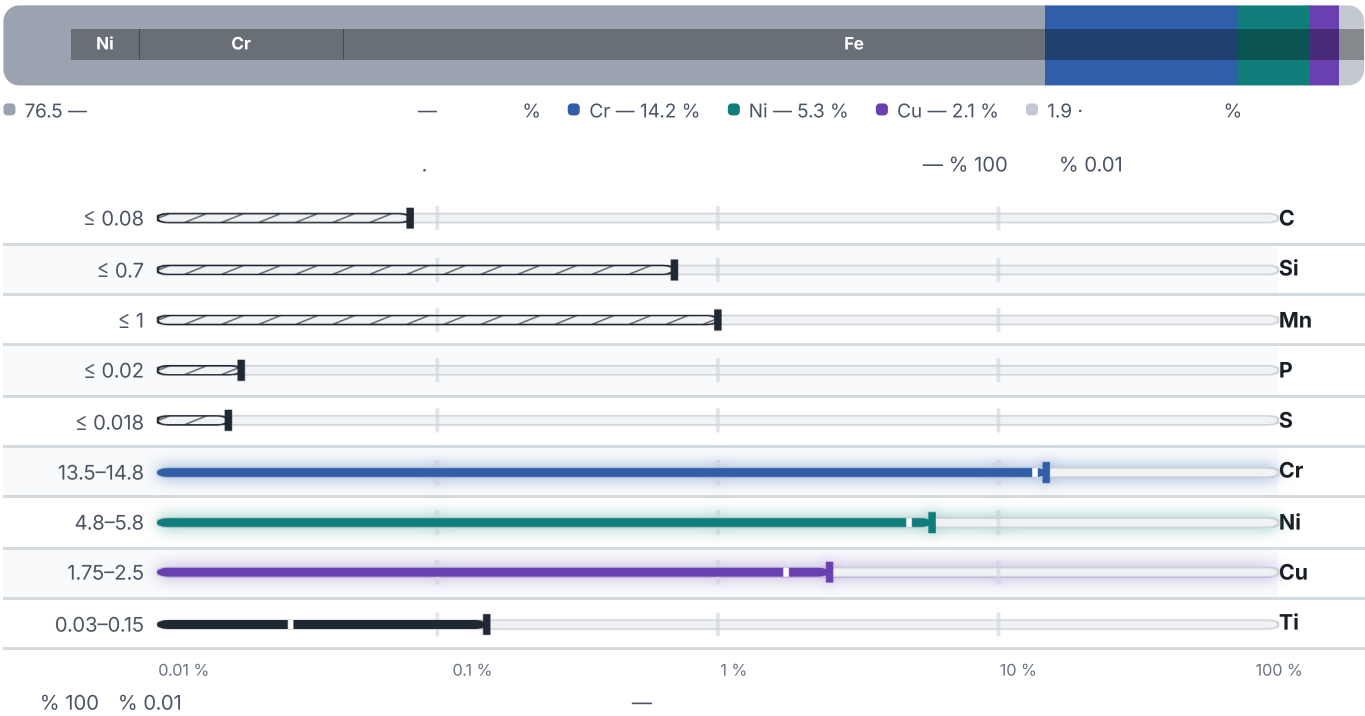

.Mo : —

1	5				
KCU kJ/m ²	Z %	A5 %	RE N/mm ²	RM N/mm ²	QUENCHING 950°C,COOLING AIR
1200	55	10	785	1080	Ø 80

1	7				
	7			/	
	gost	08Kh15N5D2TU			
	gost		08X15H5Д2ТУ		
	gost		08X15H5Д2ТУ-ВД		
	gost		08X15H5Д2ТУ-Ш		
	gost		ЭП410У		
	gost		ЭП410У-ВД		
	gost		ЭП410У-Ш		

EN 10204 2.1	.EN 10204				
				3.2	3.1

08X15H5Д2ТУ-ВД

2026/08/18