


15Kh18N12S4TYuL

15Kh18N12S4L()

, · , 1 6 .

6 ₁	9
----------------	---

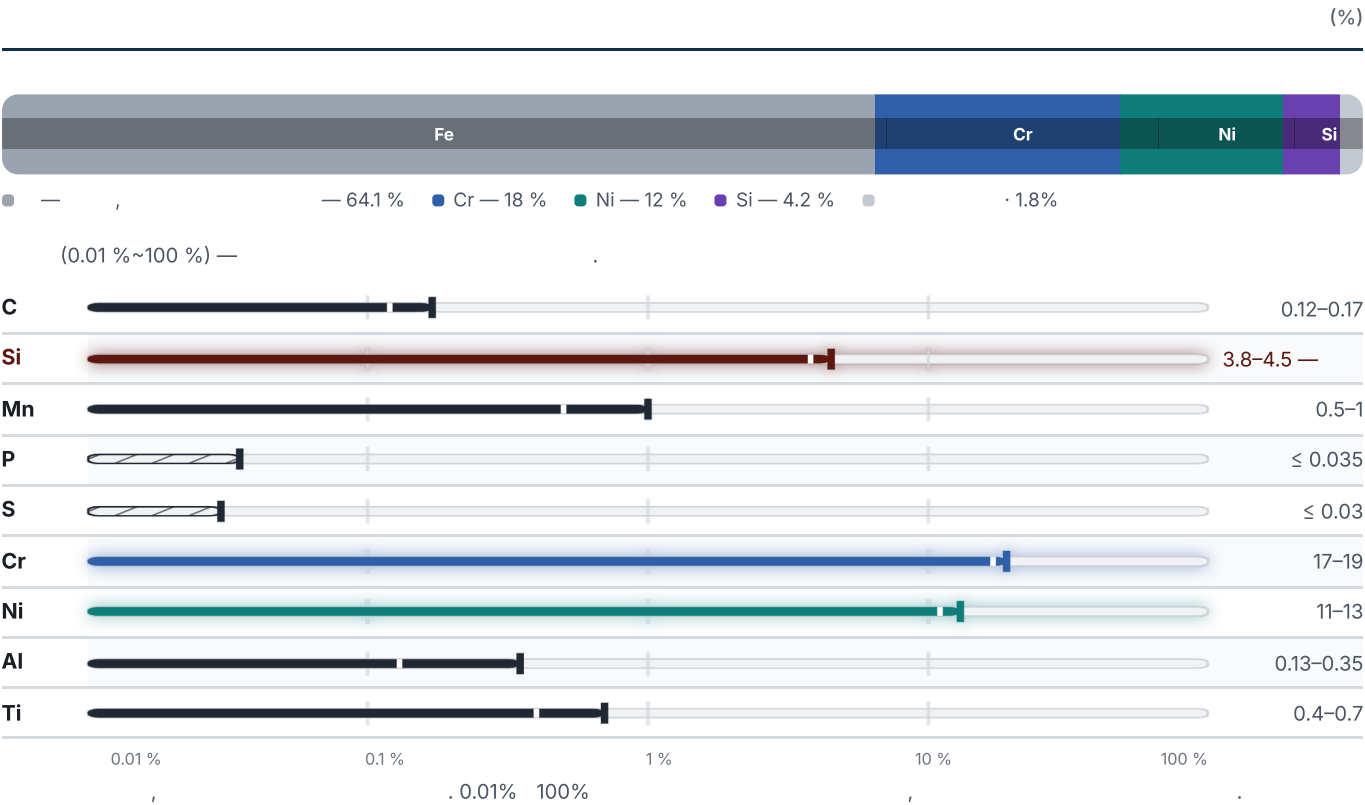

— : Mo.

5 , 20

	RM N/mm ²	RE N/mm ²	A5 %		
Sheet trick, GOST 7350-77	690–930	345	30		
Sheet thin, GOST 4986-79	690	–	13–25		
	RM N/mm ²	RE N/mm ²	A5 %		
Sheet thin cold-worked , GOST 5582-75	880	685	10		
Sheet thin cold-worked , GOST 4986-79	830–1080	–	5–10		
QUENCHING 950 - 1050°C,COOLING WATER	RM N/mm ²	RE N/mm ²	A5 %	Z %	KCU kJ/m ²
Ø 60	720	375	25	40	780
	RM N/mm ²	RE N/mm ²			
to 600	715				382
	RM N/mm ²	RE N/mm ²	A5 %		
Sheet thin, GOST 5582-75	720	345	30		

6 · 1

/ CIS	6
15Kh18N12S4L	gost
15KH18N12S4TYU	gost
15Kh18N12S4TYuL	gost
15X18H12C4TЮ	gost
ЭИ654	gost
ЭИ654Л	gost

	EN 10204	EN 10204 2.1, 3.1	3.2
--	----------	-------------------	-----

15Kh18N12S4TYuL

— 2026. 8. 17.