


CE20BG2

1518()

， · ， 4 4 。

4 ₄	8
----------------	---

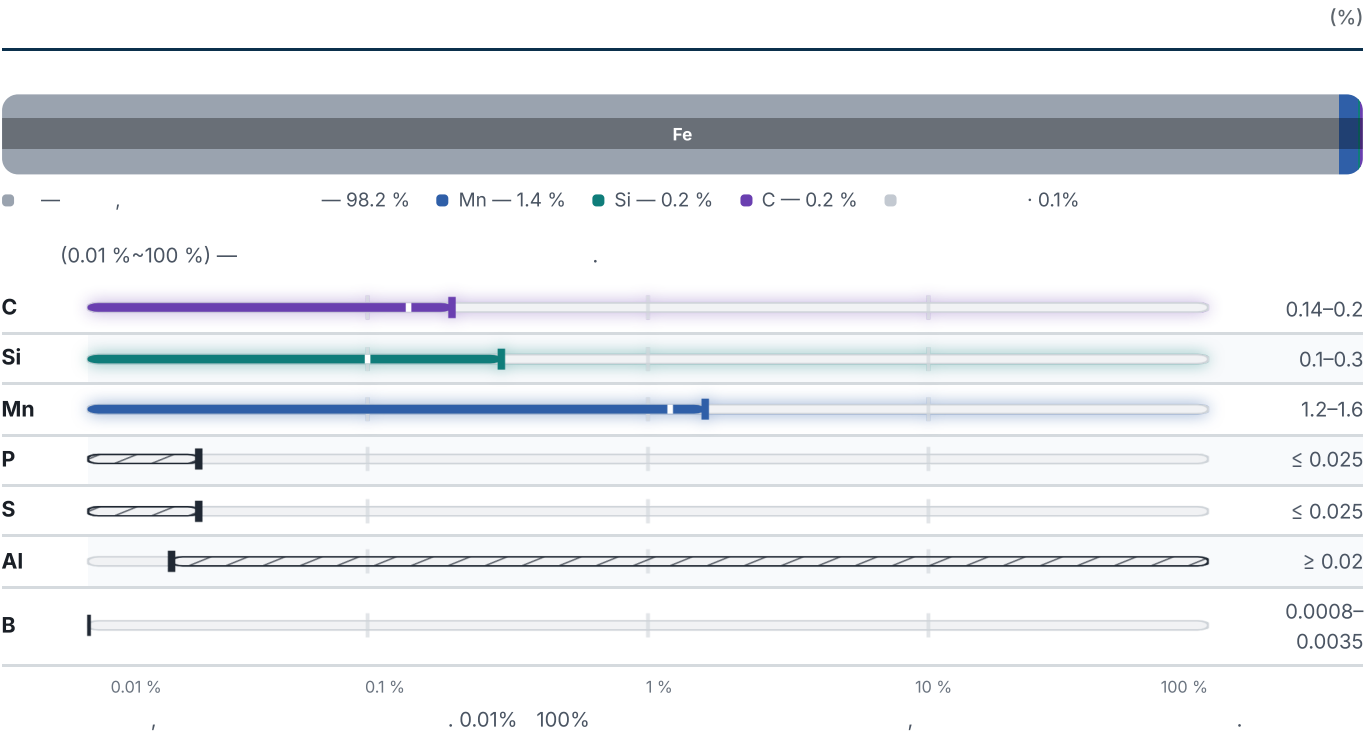

— : Ni, Cr, Mo.

1 , 3

	RM N/mm ²	RE N/mm ²	A %
25 - 25	≥ 1130	≥ 930	≥ 9

source joins the operations with + / procedural order

860–890 °C
200–240 °C —

source joins the operations with + / procedural order

860–900 °C
200–240 °C —

4 · 1

1518	1	astm	SWRCHB620	1	jis
CE20BG2	1	iso	ML15MnB	1	gb

EN 10204	EN 10204 2.1, 3.1	3.2
----------	-------------------	-----

CE20BG2

2026. 8. 15.