

MATERIAL NUMBER 1.1274 · CLASS 1.1

# C100RR

Material no. 1.1274

also listed as C100S

Chemical composition, mechanical and physical property values, and 26 standard designations from 13 regions.

|                                          |                                               |                                     |
|------------------------------------------|-----------------------------------------------|-------------------------------------|
| DENSITY<br><b>7.85</b> g/cm <sup>3</sup> | OTHER DESIGNATIONS<br><b>26</b> in 13 regions | PROPERTY VALUES<br><b>9</b> on file |
|------------------------------------------|-----------------------------------------------|-------------------------------------|


## Chemical composition

Mass fraction in %

What this alloy is



Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

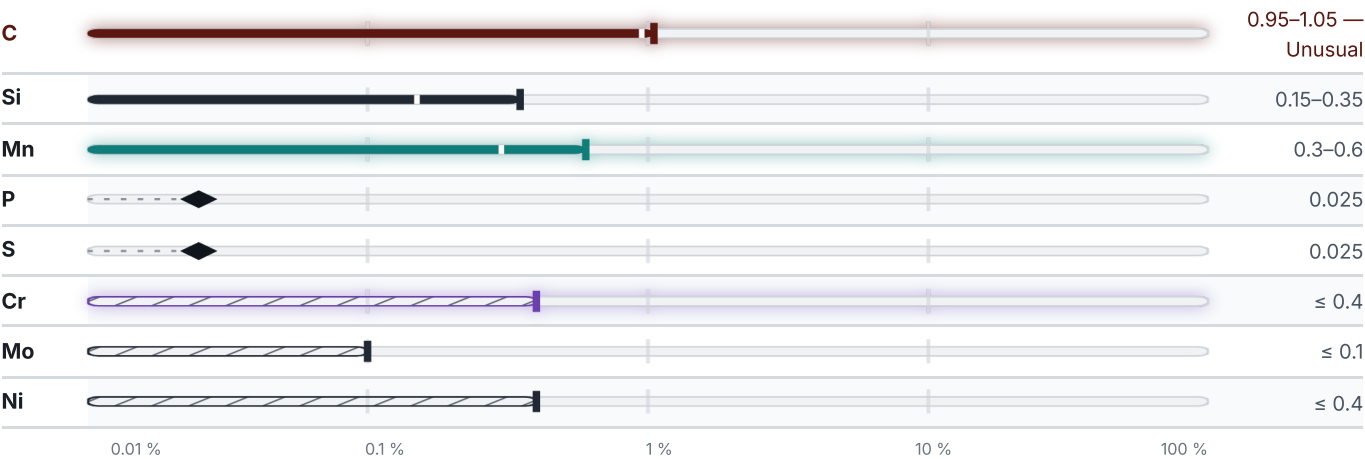

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

## Predicted transformation temperatures

This grade's composition falls outside the published model's validated range (a low-alloy composition window), so no transformation temperature is predicted here.

Mechanical properties

7 values across 6 conditions

|                       |                         |           |
|-----------------------|-------------------------|-----------|
| SOFT ANNEALED         | RM<br>N/mm <sup>2</sup> | A80<br>%  |
| 0.3 – 3               | 690                     | 13        |
| COLD ROLLED           | RM<br>N/mm <sup>2</sup> |           |
| 0.3 – 3               |                         | 1200      |
| QUENCHED AND TEMPERED | RM<br>N/mm <sup>2</sup> |           |
| 0.3 – 3               |                         | 1200–2100 |
| SOFT ANNEALED         |                         | HV        |
| Soft annealed         |                         | 220       |
| COLD ROLLED           |                         | HV        |
| Cold rolled           |                         | 325       |
| QUENCHED AND TEMPERED |                         | HV        |
| Quenched and tempered |                         | 370–630   |

Physical properties

1 values

|          |       |                   |
|----------|-------|-------------------|
| PROPERTY | VALUE | UNIT              |
| Density  | 7.85  | g/cm <sup>3</sup> |

Designations across standards

26 designations · 4 documented as identical

|                                           |        |                                           |          |
|-------------------------------------------|--------|-------------------------------------------|----------|
| Japan                                     | 4      | France                                    | 3        |
| SK 4                                      | jis    | C100RR                                    | afnor    |
| SK4-CSP                                   | jis    | E100                                      | afnor    |
| SK95-CSP                                  | jis    | XC100                                     | afnor    |
| SUP 4                                     | jis    |                                           |          |
| Europe                                    | 3      | Spain                                     | 3        |
| 1.1274                                    | din-en | A-5117                                    | une      |
| C100S <span>This grade's own name</span>  | din-en | C 102                                     | une      |
| Ck 101 <span>This grade's own name</span> | din-en | F.5117                                    | une      |
| United Kingdom                            | 3      | United States                             | 2        |
| 060A96                                    | bs     | G10950 <span>This grade's own name</span> | uns      |
| CS95                                      | bs     | 1095 <span>This grade's own name</span>   | aisi-sae |
| HS95                                      | bs     |                                           |          |

|               |     |                         |        |
|---------------|-----|-------------------------|--------|
| Italy         | 2   | Brazil                  | 1      |
| C100          | uni | 1095                    | abnt   |
| E4            | uni |                         |        |
| International | 1   | Latin America           | 1      |
| CS95          | iso | 1095                    | copant |
| Sweden        | 1   | Australia / New Zealand | 1      |
| 1870          | ss  | K1095                   | as-nzs |
|               |     | Romania                 | 1      |
|               |     | OSC 10                  | stas   |

**Note on use.** The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

### Enquiry about C100RR

Quotation, availability, mill certificate or a technical question — directly on the material page.

[Start an enquiry](#)

|                                        |                                   |              |             |
|----------------------------------------|-----------------------------------|--------------|-------------|
| DATASHEET ONLINE                       | GRADE SEARCH                      | MATERIAL NO. | ISSUED      |
| <a href="#">View the material page</a> | <a href="#">Search all grades</a> | 1.1274       | Sep 8, 2026 |