

ML42CrMo

also listed as 42CrMo4


Chemical composition, mechanical and physical property values, and 5 standard designations from 5 regions.

OTHER DESIGNATIONS	PROPERTY VALUES
5 in 5 regions	9 on file


Chemical composition

Mass fraction in %

What this alloy is

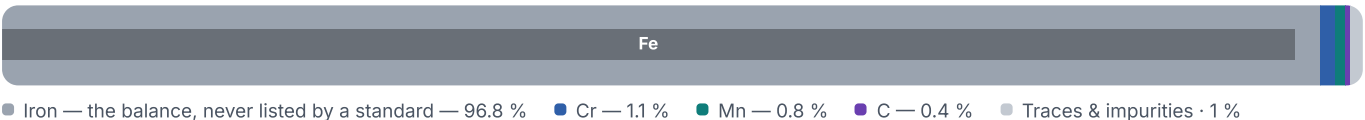

Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

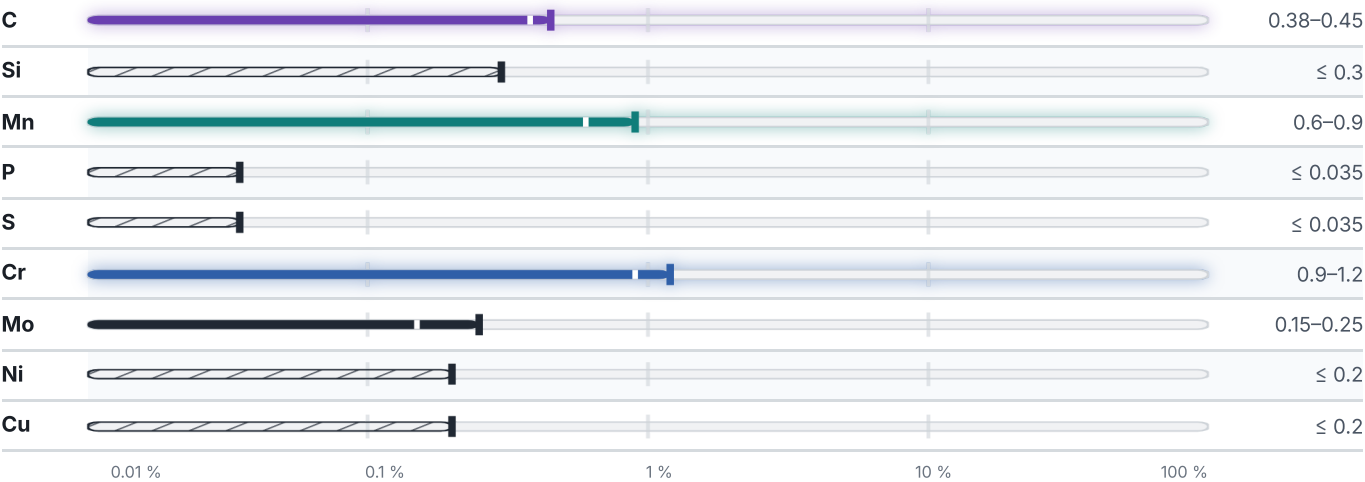

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

Predicted transformation temperatures

computed from composition · °C

PREDICTED AE3 769 °C	PREDICTED AE1 742 °C	PREDICTED ACM 645 °C	PREDICTED BS 525 °C
-------------------------	-------------------------	-------------------------	------------------------

Heat treatment

1 regimes

STEP	TEMPERATURE	MEDIUM
source joins the operations with + / procedural order		
Quenching	830–870 °C	Oil
Tempering	500–600 °C	—

Designations across standards

5 designations · 1 documented as identical

Europe	1	Japan	1
42CrMo4	din-en	SCM440	jis
United States	1	China	1
4140	aisi-sae	ML42CrMo	This grade's own name gb
International	1		
42CrMo4E	iso		

Note on use. The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

Enquiry about ML42CrMo

Quotation, availability, mill certificate or a technical question — directly on the material page.

[Start an enquiry](#)

DATASHEET ONLINE	GRADE SEARCH	MATERIAL NO.	ISSUED
View the material page	Search all grades	—	Aug 15, 2026