

MATERIAL NUMBER 1.8903 · CLASS 1.8

# Q460E

Material no. 1.8903


also listed as S460NL

Chemical composition, mechanical and physical property values, and 7 standard designations from 5 regions.


|                              |                                             |                                      |
|------------------------------|---------------------------------------------|--------------------------------------|
| DENSITY<br><b>7.85</b> g/cm³ | OTHER DESIGNATIONS<br><b>7</b> in 5 regions | PROPERTY VALUES<br><b>15</b> on file |
|------------------------------|---------------------------------------------|--------------------------------------|

Chemical composition

Mass fraction in %

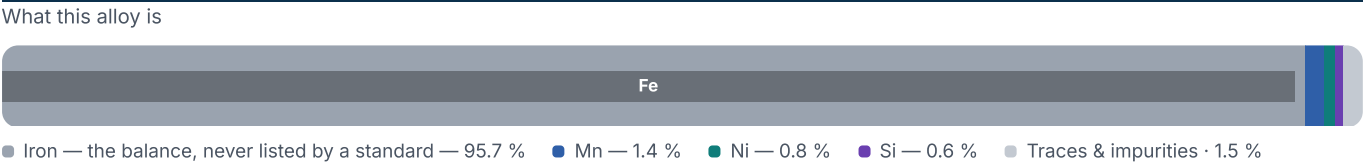

Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

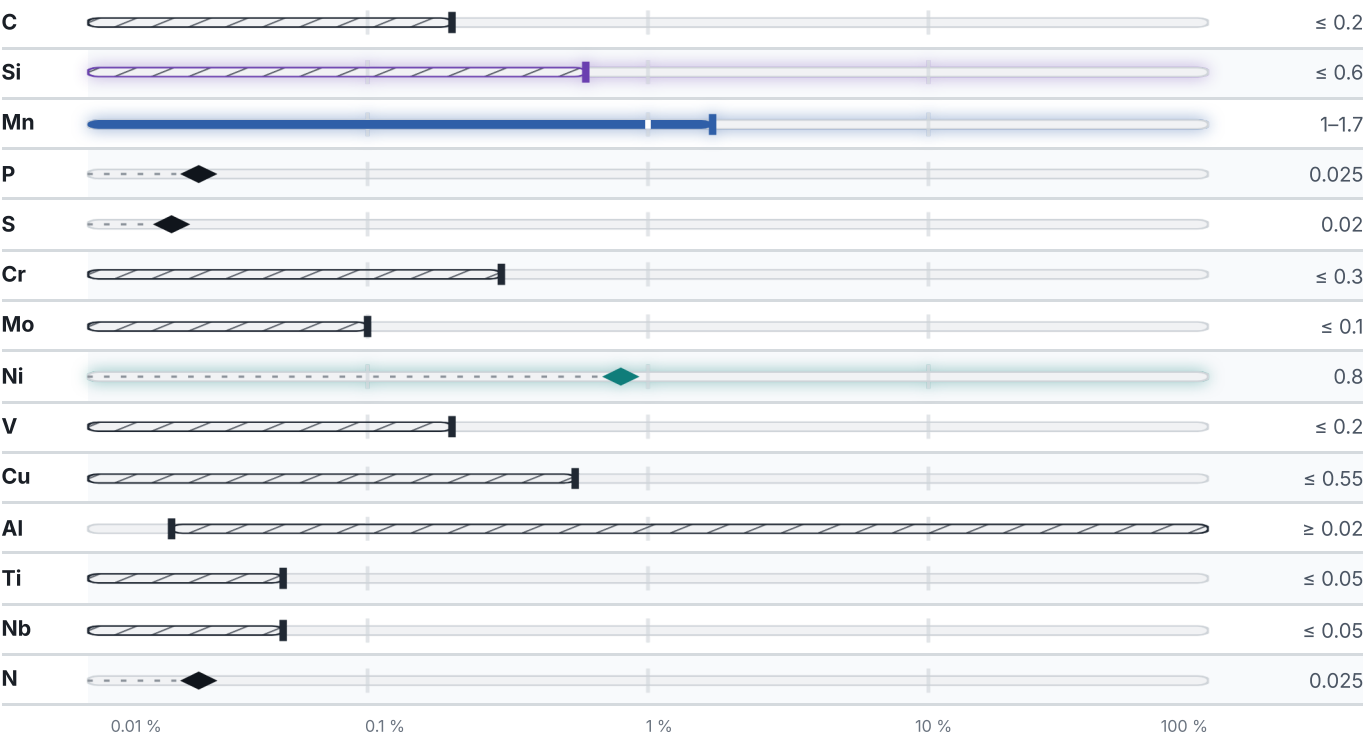

The scale is logarithmic, not the element’s raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

Predicted transformation temperatures

computed from composition · °C

|                         |                         |                         |                        |
|-------------------------|-------------------------|-------------------------|------------------------|
| PREDICTED AE3<br>807 °C | PREDICTED AE1<br>708 °C | PREDICTED ACM<br>438 °C | PREDICTED BS<br>540 °C |
|-------------------------|-------------------------|-------------------------|------------------------|

Mechanical properties

14 values across 1 conditions

| CONDITION · DIMENSION | REH<br>N/mm² | RM<br>N/mm² | A<br>% |
|-----------------------|--------------|-------------|--------|
| ≤ 16                  | 460          | –           | 17     |
| 16 – 40               | 440          | –           | 17     |
| 40 – 63               | 430          | –           | 17     |
| 63 – 80               | 410          | –           | 17     |
| 80 – 100              | 400          | –           | –      |
| 80 – 200              | –            | –           | 17     |
| ≤ 100                 | –            | 540–720     | –      |
| 100 – 200             | –            | 530–710     | –      |
| 100 – 150             | 380          | –           | –      |
| 150 – 200             | 370          | –           | –      |

Physical properties

1 values

| PROPERTY | VALUE | UNIT  |
|----------|-------|-------|
| Density  | 7.85  | g/cm³ |

Designations across standards

7 designations · 2 documented as identical

|                                             |        |           |       |
|---------------------------------------------|--------|-----------|-------|
| Europe                                      | 3      | France    | 1     |
| FeE460KTN                                   | din-en | E460FP    | afnor |
| S460NL <span>This grade's own name</span>   | din-en | China     | 1     |
| TStE 460 <span>This grade's own name</span> | din-en | Q460E     | gb    |
| United Kingdom                              | 1      | Italy     | 1     |
| 55EE                                        | bs     | FeE460KTN | uni   |

**Note on use.** The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

### Enquiry about Q460E

Quotation, availability, mill certificate or a technical question — directly on the material page.

[Start an enquiry](#)

DATASHEET ONLINE

[View the material page](#)

GRADE SEARCH

[Search all grades](#)

MATERIAL NO.

1.8903

ISSUED

Aug 20, 2026