

SCM415M

Chemical composition, mechanical and physical property values, and 2 standard designations from 2 regions.

OTHER DESIGNATIONS	PROPERTY VALUES
2 in 2 regions	9 on file

Chemical composition


Mass fraction in %

What this alloy is



● Iron — the balance, never listed by a standard — 97 % ● Cr — 1.1 % ● Mn — 0.7 % ● Cu — 0.3 % ● Traces & impurities · 0.9 %

Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

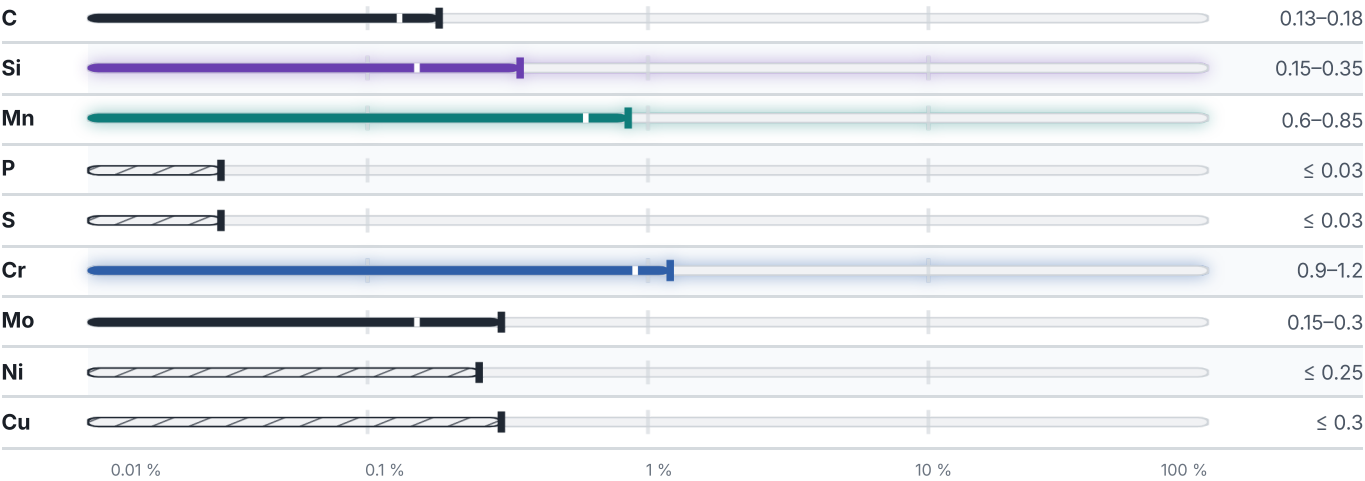

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

Predicted transformation temperatures

computed from composition · °C

PREDICTED AE3 819 °C	PREDICTED AE1 743 °C	PREDICTED ACM 450 °C	PREDICTED BS 540 °C
-------------------------	-------------------------	-------------------------	------------------------

Mechanical properties

2 values across 1 conditions

CONDITION · DIMENSION	HV
Annealed	170
Cold-rolled	170–240

Designations across standards

2 designations · 2 documented as identical

Japan	1	South Korea	1
SCM415M	This grade's own name jis	SCM415M	This grade's own name ks

Note on use. The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

Enquiry about SCM415M

Quotation, availability, mill certificate or a technical question — directly on the material page.

[Start an enquiry](#)

DATASHEET ONLINE	GRADE SEARCH	MATERIAL NO.	ISSUED
View the material page	Search all grades	—	Aug 15, 2026