

SUS316LTB

Chemical composition, mechanical and physical property values, and 1 standard designations from 1 regions.

OTHER DESIGNATIONS	PROPERTY VALUES
1 in 1 regions	8 on file


Chemical composition

Mass fraction in %

What this alloy is



Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

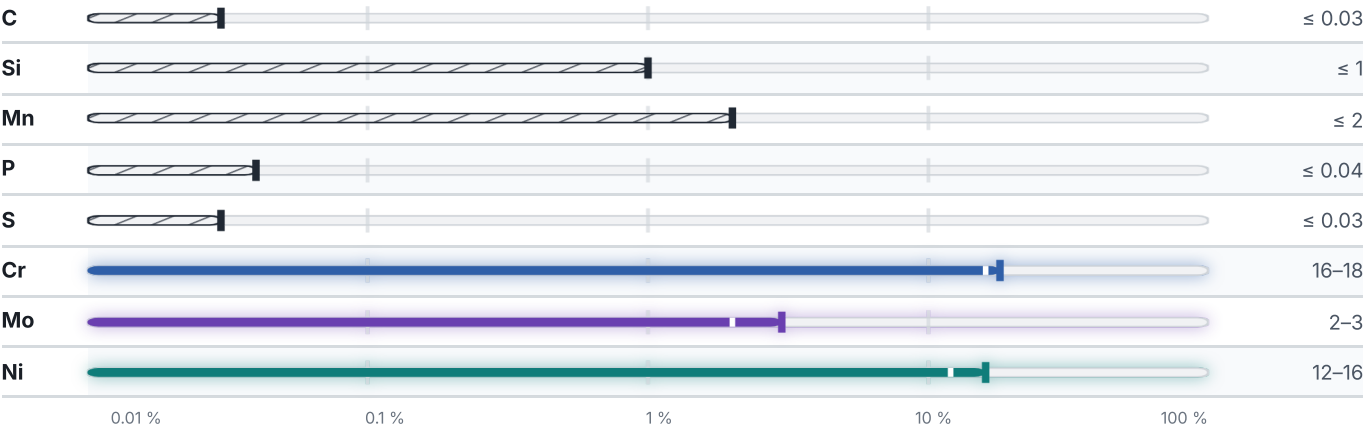

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

Predicted transformation temperatures

This grade's composition falls outside the published model's validated range (a low-alloy composition window), so no transformation temperature is predicted here.

Mechanical properties

3 values across 1 conditions

CONDITION · DIMENSION	RM N/mm ²	RE N/mm ²	A %
Tubes	480	175	27–35

Designations across standards

1 designations · 1 documented as identical

Japan	1
SUS316LTB This grade's own name	jis

Note on use. The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

Enquiry about SUS316LTB

Quotation, availability, mill certificate or a technical question — directly on the material page.

[Start an enquiry](#)

DATASHEET ONLINE	GRADE SEARCH	MATERIAL NO.	ISSUED
View the material page	Search all grades	—	Aug 20, 2026