


E40Z25

1 1

1 1	12
-----	----

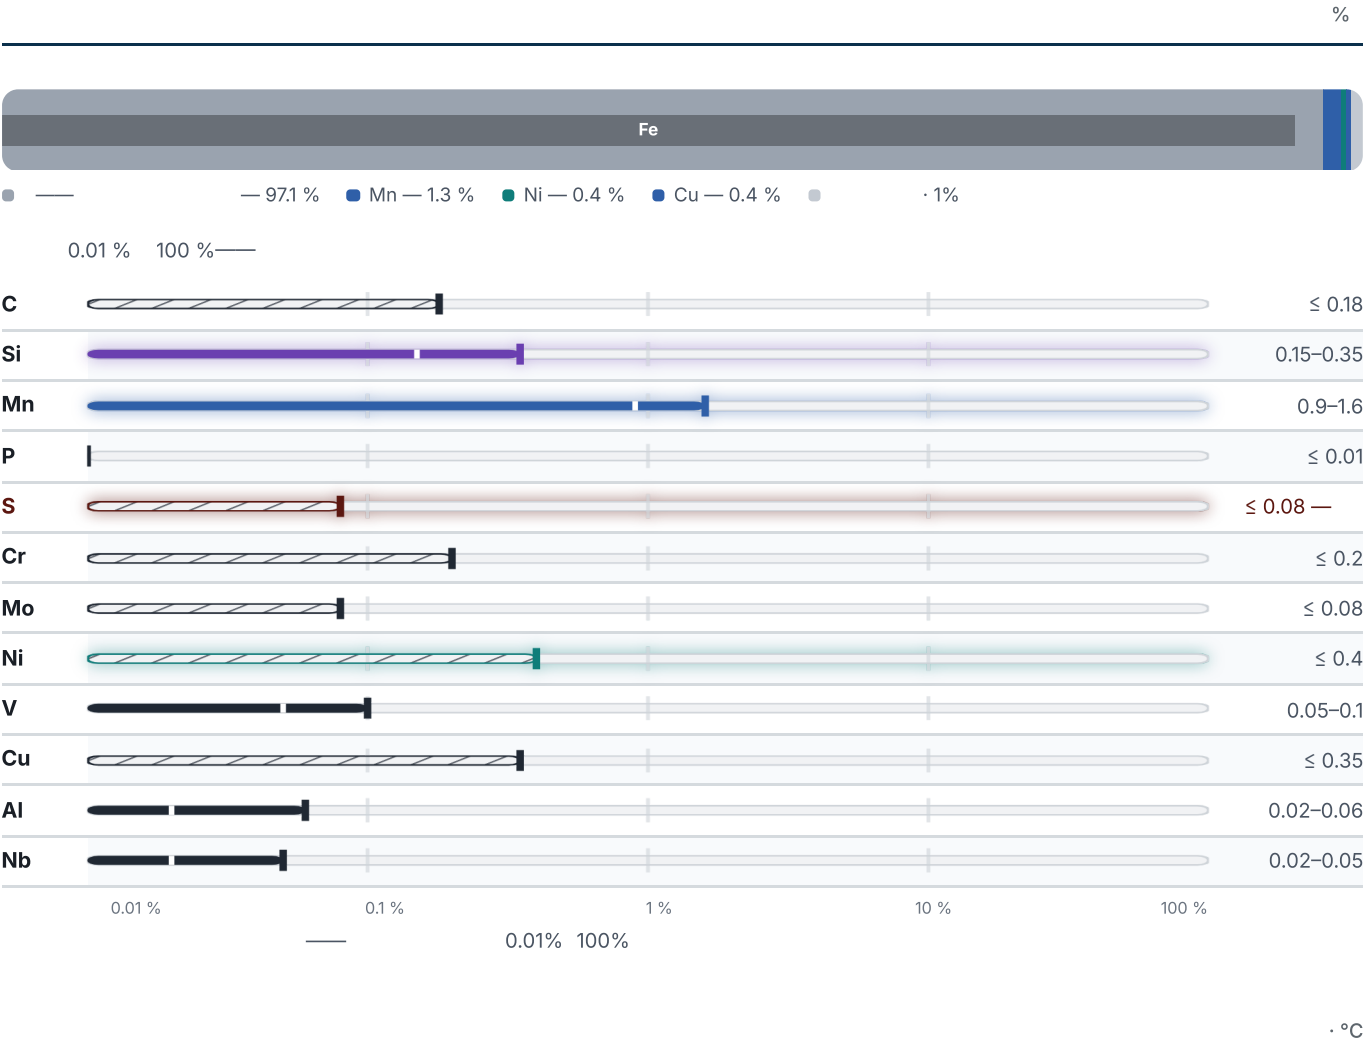

AE3 808 °C	AE1 707 °C	ACM 414 °C	BS 554 °C
---------------	---------------	---------------	--------------

13

	RM N/mm ²	RE N/mm ²	A5 %
Rolled stock, GOST 52927-2008	510-660	390	20

1 · 1

/1

E40Z25gost

EN 10204	EN 10204 2.1 3.1 3.2
----------	----------------------

E40Z25

—2026 8 18