
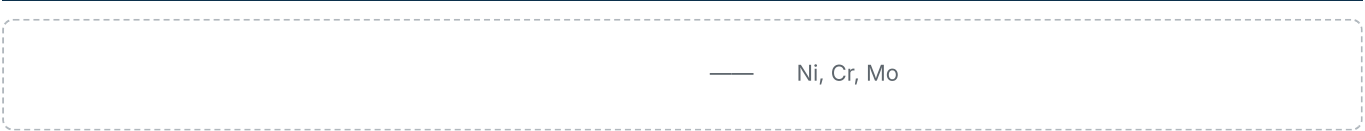


CE20BG2

1518

4 4

4 4	8
-----	---

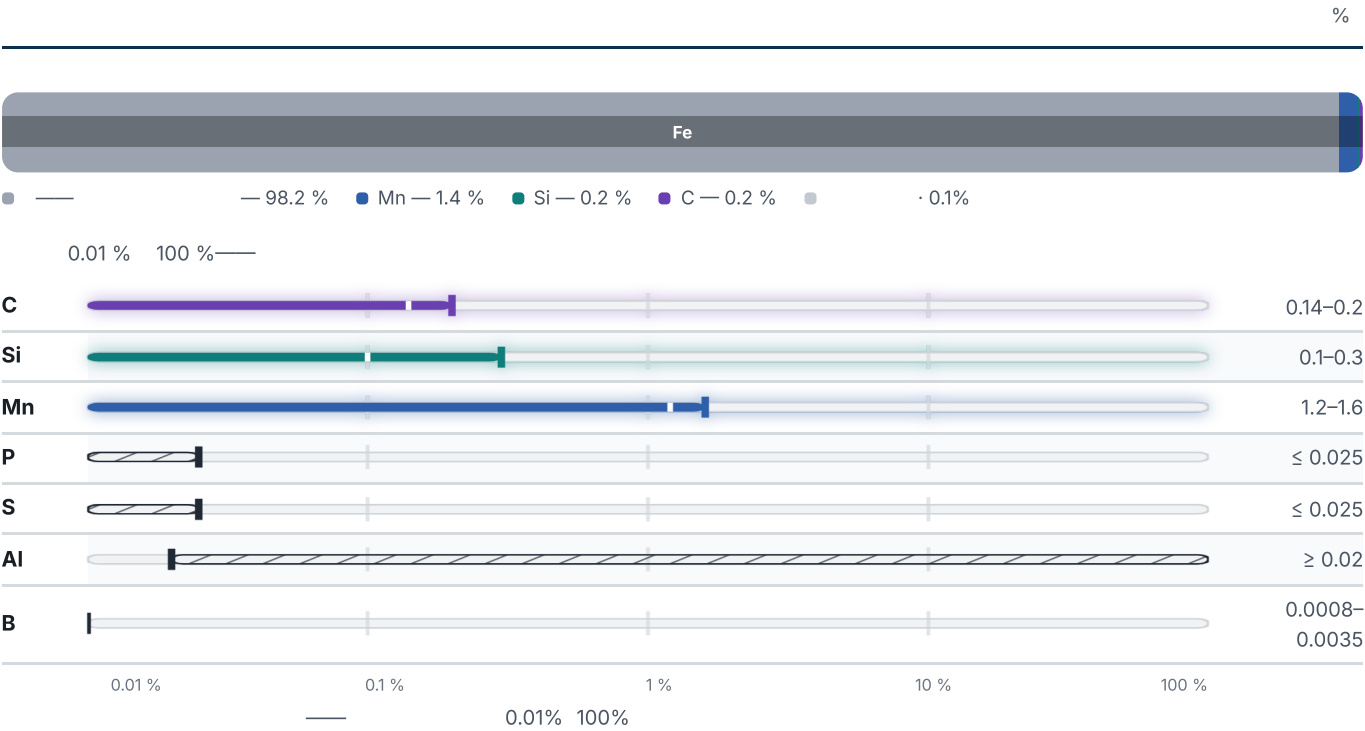

1 3

	RM N/mm ²	RE N/mm ²	A %
25 – 25	≥ 1130	≥ 930	≥ 9

source joins the operations with + / procedural order

860–890 °C

200–240 °C —

source joins the operations with + / procedural order

860–900 °C

200–240 °C —

4 · 1

	1		1
1518	astm	SWRCHB620	jis
	1		1
CE20BG2	iso	ML15MnB	gb

EN 10204	EN 10204 2.1 3.1 3.2
----------	----------------------

CE20BG2