


SCM415M

2 2

2 2	9
-----	---

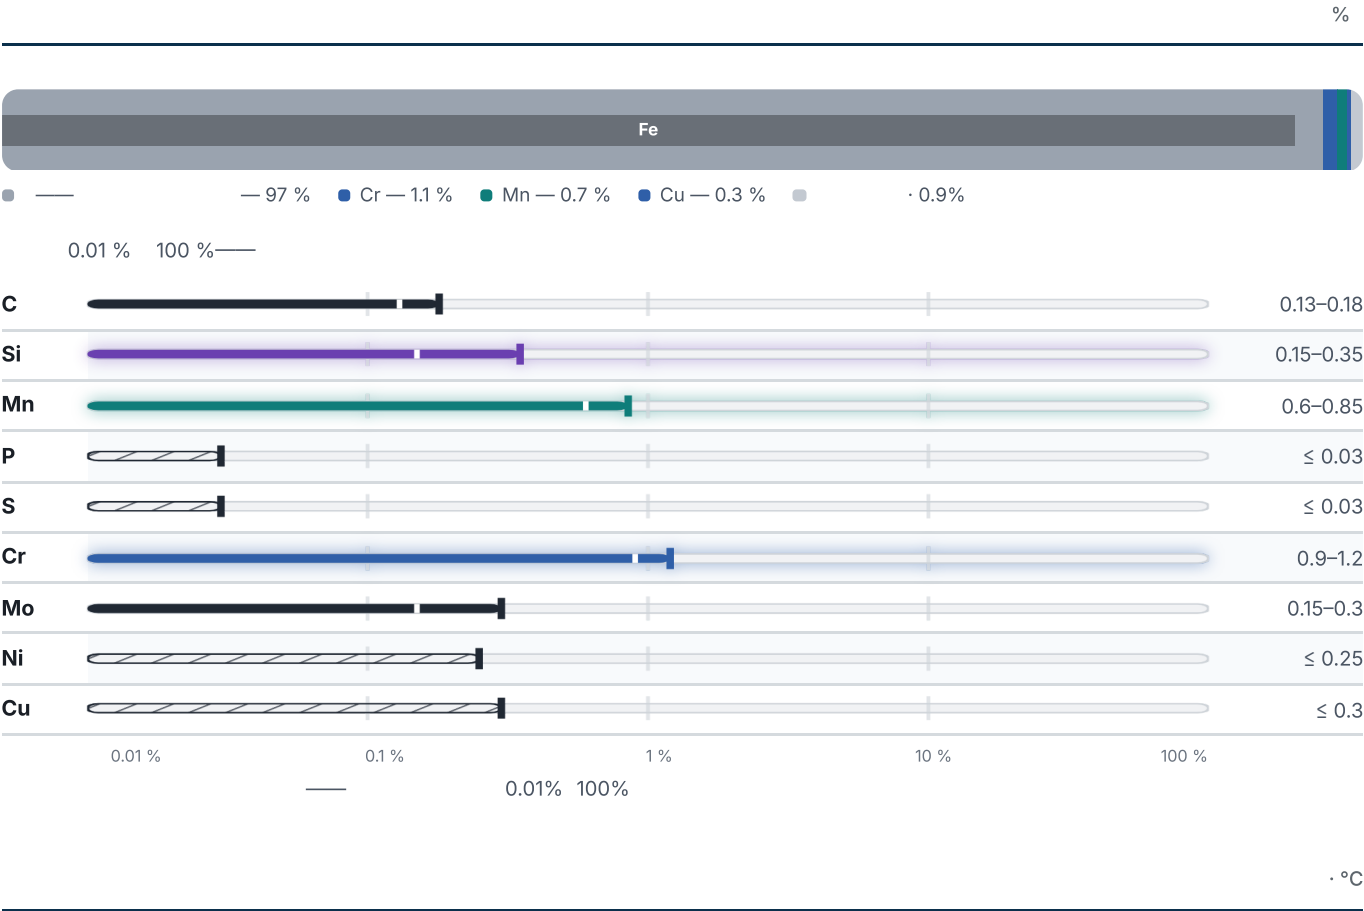

AE3 819 °C	AE1 743 °C	ACM 450 °C	BS 540 °C
---------------	---------------	---------------	--------------

12

.	HV
Annealed	170
Cold-rolled	170–240

2 · 2

SCM415M	1	SCM415M	1
	jis		ks

EN 10204	EN 10204 2.1 3.1 3.2
----------	----------------------

SCM415M

2026 8 15