

MATERIAL NUMBER 1.4749 · CLASS 1.4

# 51446

## Material no. 1.4749

also listed as X15CrN26

Chemical composition, mechanical and physical property values, and 25 standard designations from 9 regions.

| DENSITY                       | OTHER DESIGNATIONS     | PROPERTY VALUES  |
|-------------------------------|------------------------|------------------|
| <b>7.85</b> g/cm <sup>3</sup> | <b>25</b> in 9 regions | <b>8</b> on file |

### Chemical composition


Mass fraction in %

What this alloy is



■ Iron — the balance, never listed by a standard — 70.1 % ■ Cr — 27.5 % ■ Si — 1 % ■ Mn — 1 % ■ Traces & impurities · 0.4 %

Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

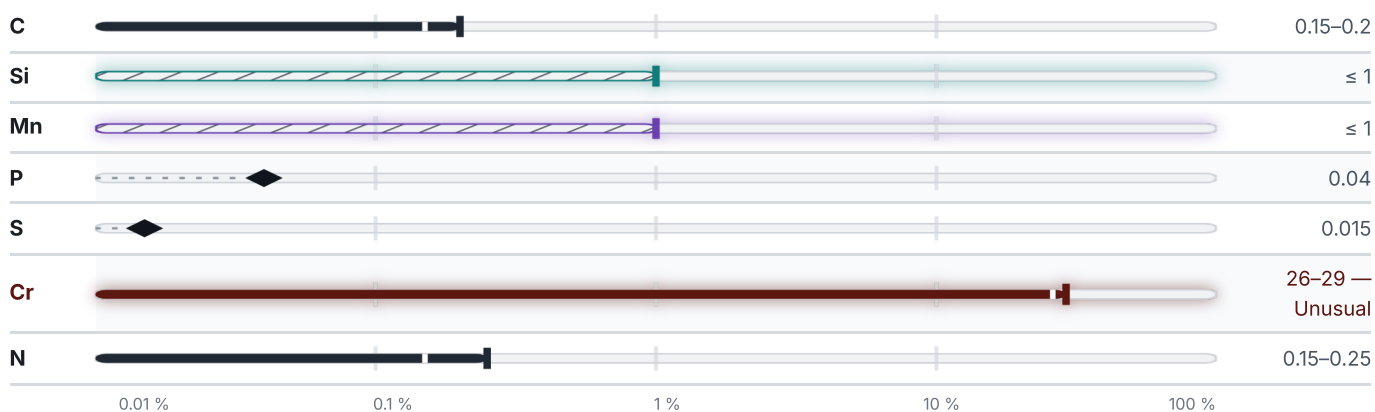

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

### Predicted transformation temperatures

Not enough recorded composition to predict a transformation temperature for this grade — missing: Ni, Mo.

Mechanical properties

5 values across 2 conditions

| CONDITION · DIMENSION | RM<br>N/mm <sup>2</sup> | RE<br>N/mm <sup>2</sup> | A<br>% | Z<br>% |
|-----------------------|-------------------------|-------------------------|--------|--------|
| Bars/Rods Annealing   | 510                     | 275                     | 20     | 40     |
| SOFT ANNEALED         |                         |                         |        | HB     |
| Soft annealed         |                         |                         |        | 212    |

Physical properties

1 values

| PROPERTY | VALUE | UNIT              |
|----------|-------|-------------------|
| Density  | 7.85  | g/cm <sup>3</sup> |

Designations across standards

25 designations · 4 documented as identical

|               |                       |          |               |  |      |
|---------------|-----------------------|----------|---------------|--|------|
| United States |                       | 14       | Russia / CIS  |  | 2    |
| S44600        | This grade's own name | uns      | 15Ch25T       |  | gost |
| 446           | This grade's own name | aisi-sae | 15X25T        |  | gost |
| 446-1         |                       | aisi-sae | Poland        |  | 2    |
| 51446         |                       | aisi-sae | H25           |  | pn   |
| S44600        |                       | aisi-sae | H25T          |  | pn   |
| A1012         |                       | astm     | International |  | 1    |
| A176          |                       | astm     | X15CrN26      |  | iso  |
| A268          |                       | astm     | Japan         |  | 1    |
| A276          |                       | astm     | SUH 446       |  | jis  |
| A314          |                       | astm     | China         |  | 1    |
| A473          |                       | astm     | 2Cr25N        |  | gb   |
| A511          |                       | astm     | Italy         |  | 1    |
| A580          |                       | astm     | X16Cr26       |  | uni  |
| A815          |                       | astm     | Sweden        |  | 1    |
| Europe        |                       | 2        | 2322          |  | ss   |
| X15CrN26      | This grade's own name | din-en   |               |  |      |
| X18CrN28      | This grade's own name | din-en   |               |  |      |

**Note on use.** The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

### Enquiry about 51446

Quotation, availability, mill certificate or a technical question — directly on the material page.

[Start an enquiry](#)

DATASHEET ONLINE

[View the material page](#)

GRADE SEARCH

[Search all grades](#)

MATERIAL NO.

1.4749

ISSUED

Aug 20, 2026