

12KH8VF

also listed as 12Kh8

Chemical composition, mechanical and physical property values, and 4 standard designations from 1 regions.

OTHER DESIGNATIONS	PROPERTY VALUES
4 in 1 regions	8 on file

Chemical composition


Mass fraction in %

What this alloy is



■ Iron — the balance, never listed by a standard — 90.2 % ■ Cr — 8.3 % ■ Mn — 0.4 % ■ Ni — 0.4 % ■ Traces & impurities · 0.7 %

Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

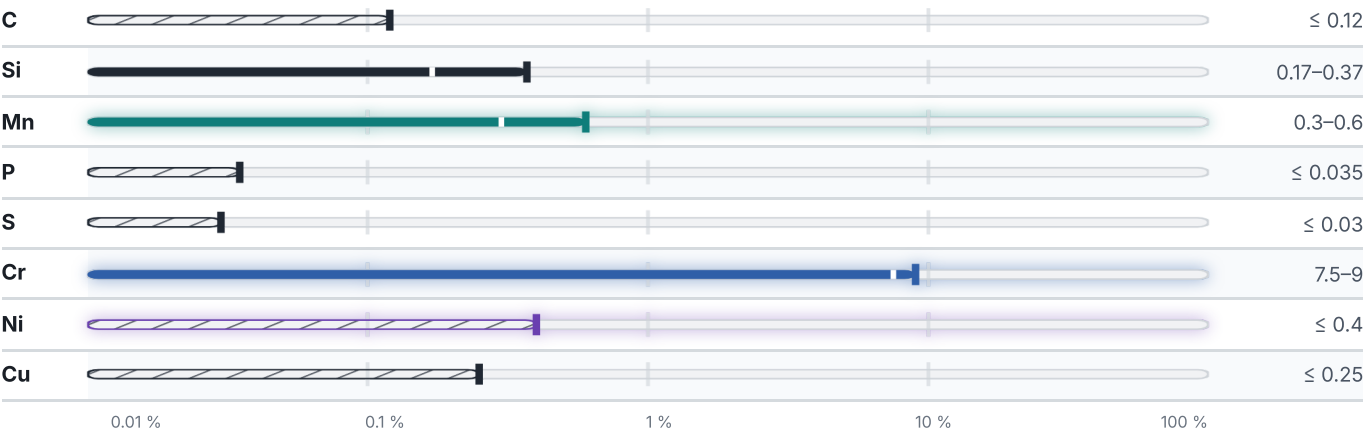

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

Predicted transformation temperatures

Not enough recorded composition to predict a transformation temperature for this grade — missing: Mo.

Mechanical properties

12 values across 2 conditions

CONDITION · DIMENSION	RM N/mm ²	RE N/mm ²	A5 %	Z %	KCU kJ/m ²	HB
Pipe hot strain, GOST 550-75	392	167	22	50	980	–
12KH8VF (12X8BΦ) (hot-rolled, annealing) , GOST 20072-74	–	–	–	–	–	217
12KH8VF (12X8BΦ) , Pipe GOST 550-75	–	–	–	–	–	170

CONDITION · DIMENSION	RM N/mm ²	RE N/mm ²	A5 %	Z %	KCU kJ/m ²
Bar, GOST 20072-74	390	165	22	50	980

Designations across standards

4 designations · 1 documented as identical

Russia / CIS	4
12Kh8 This grade's own name	gost
12KH8VF	gost
12X8	gost
1X8BΦ	gost

Note on use. The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

Enquiry about 12KH8VF

Quotation, availability, mill certificate or a technical question — directly on the material page.

Start an enquiry

DATASHEET ONLINE

View the material page

GRADE SEARCH

Search all grades

MATERIAL NO.

—

ISSUED

Aug 15, 2026