

MATERIAL NUMBER 1.2453 · CLASS 1.2

# K400

## Material no. 1.2453

also listed as X130W5

Chemical composition, mechanical and physical property values, and 8 standard designations from 6 regions.

|                                          |                                             |                                      |
|------------------------------------------|---------------------------------------------|--------------------------------------|
| DENSITY<br><b>7.85</b> g/cm <sup>3</sup> | OTHER DESIGNATIONS<br><b>8</b> in 6 regions | PROPERTY VALUES<br><b>11</b> on file |
|------------------------------------------|---------------------------------------------|--------------------------------------|


Chemical composition

Mass fraction in %

What this alloy is



Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

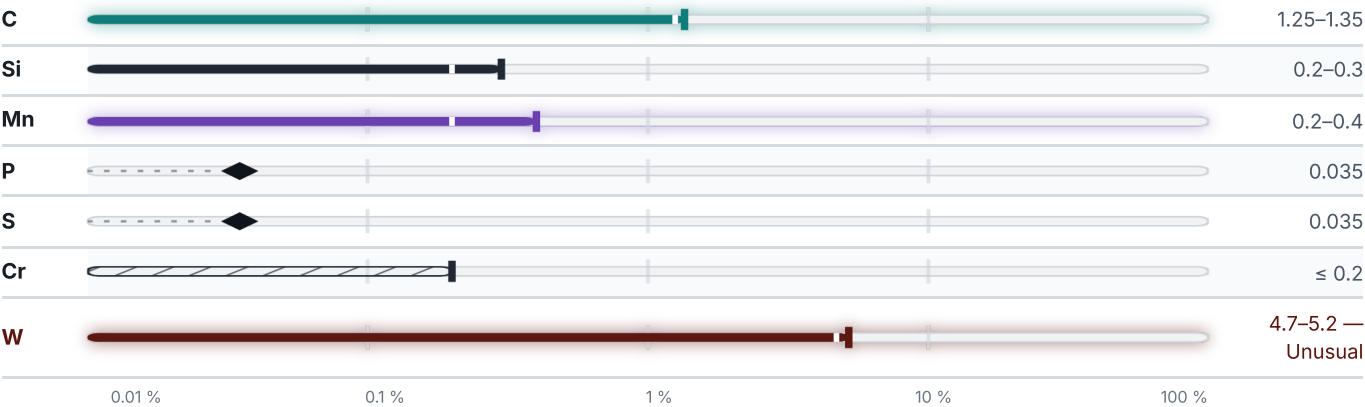

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

### Predicted transformation temperatures

Not enough recorded composition to predict a transformation temperature for this grade — missing: Ni, Mo.

## Mechanical properties

1 values across 1 conditions

| CONDITION · DIMENSION | HB  |
|-----------------------|-----|
| (annealing)           | 255 |

## Physical properties

4 values

| PROPERTY                 | VALUE | UNIT              |
|--------------------------|-------|-------------------|
| Density                  | 7.85  | g/cm <sup>3</sup> |
| Transformation point Ac1 | 750   | °C                |

## Technological properties

| PROPERTY           | VALUE              | UNIT |
|--------------------|--------------------|------|
| Weldability        | is not used.       |      |
| Temper brittleness | weakly predisposed |      |

## Designations across standards

8 designations · 1 documented as identical

|                     |                       |                      |          |
|---------------------|-----------------------|----------------------|----------|
| <b>Russia / CIS</b> | 2                     | <b>United States</b> | 1        |
| KHV4F               | gost                  | F2                   | aisi-sae |
| XB4Φ                | gost                  |                      |          |
| <b>Czechia</b>      | 2                     | <b>Japan</b>         | 1        |
| 19 XXX NN           | csn                   | SKS11                | jis      |
| 19714               | csn                   | <b>Austria</b>       | 1        |
| <b>Europe</b>       | 1                     | K400                 | onorm    |
| X130W5              | This grade's own name | din-en               |          |

**Note on use.** The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

## Enquiry about K400

[Start an enquiry](#)

Quotation, availability, mill certificate or a technical question — directly on the material page.

## DATASHEET ONLINE

View the material page

## GRADE SEARCH

Search all grades

## MATERIAL NO.

1.2453

## ISSUED

Aug 20, 2026