

MATERIAL NUMBER 1.3243 · CLASS 1.3

# 2723

## Material no. 1.3243

also listed as HS6-5-2-5

Chemical composition, mechanical and physical property values, and 49 standard designations from 19 regions.

| DENSITY                      | OTHER DESIGNATIONS      | PROPERTY VALUES   |
|------------------------------|-------------------------|-------------------|
| <b>8.1</b> g/cm <sup>3</sup> | <b>49</b> in 19 regions | <b>15</b> on file |

### Chemical composition


Mass fraction in %

What this alloy is



● Iron — the balance, never listed by a standard — 76.1 % ● W — 6.3 % ● Mo — 5 % ● Co — 4.8 % ● Traces & impurities · 7.9 %

Logarithmic scale, 0.01 % to 100 % — every value here compares directly, decade by decade.

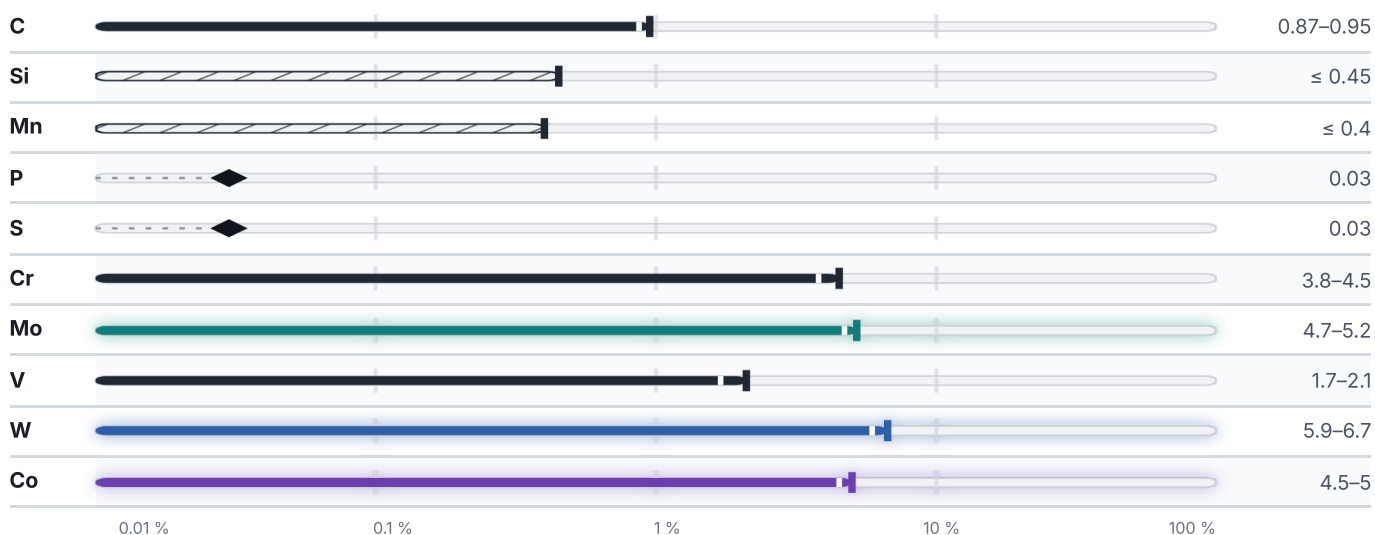

The scale is logarithmic, not the element's raw share of the alloy — the only honest way to fit 0.01 % and 100 % in one picture, and it means every value here can be compared with every other.

### Predicted transformation temperatures

Not enough recorded composition to predict a transformation temperature for this grade — missing: Ni.

Mechanical properties

8 values across 4 conditions

| CONDITION · DIMENSION       |                         |                         |         |        | HB                       |
|-----------------------------|-------------------------|-------------------------|---------|--------|--------------------------|
| Annealed                    |                         |                         |         |        | 269                      |
| SOFT ANNEALED               |                         |                         |         |        | HB                       |
| Soft annealed               |                         |                         |         |        | 269                      |
| CONDITION · DIMENSION       | RM<br>N/mm <sup>2</sup> | RE<br>N/mm <sup>2</sup> | A5<br>% | Z<br>% | KCU<br>kJ/m <sup>2</sup> |
| As-delivered state          | 850                     | 510                     | 12      | 14     | 180                      |
| CONDITION · DIMENSION       |                         |                         |         |        | HB                       |
| (annealing) , GOST 19265-73 |                         |                         |         |        | 269                      |

Physical properties

5 values

| CONDITION · DIMENSION    | RHO<br>g/cm <sup>3</sup> | E<br>GPa | LAMBDA<br>W/(m·K) | RHO_EL<br>nΩ·m |
|--------------------------|--------------------------|----------|-------------------|----------------|
| 20                       | 8.2                      | 220      | –                 | 458            |
| 100                      | –                        | –        | 27                | –              |
| 200                      | –                        | –        | 28                | –              |
| 300                      | –                        | –        | 29                | –              |
| 400                      | –                        | –        | 30                | –              |
| 500                      | –                        | –        | 32                | –              |
| 600                      | –                        | –        | 36                | –              |
| 700                      | –                        | –        | 34                | –              |
| 900                      | –                        | –        | 29                | –              |
| PROPERTY                 | VALUE                    |          | UNIT              |                |
| Density                  | 8.1                      |          | g/cm <sup>3</sup> |                |
| Transformation point Ac1 | 840                      |          | °C                |                |
| Transformation point Ac3 | 875                      |          | °C                |                |
| Transformation point Ar3 | 805                      |          | °C                |                |
| Transformation point Ar1 | 765                      |          | °C                |                |

## Heat treatment

4 regimes

| STEP                                                  | TEMPERATURE            | MEDIUM |
|-------------------------------------------------------|------------------------|--------|
| source joins the operations with + / procedural order |                        |        |
| Preheating                                            | 800–900 °C             | —      |
| Quenching                                             | 1190–1210 °C           | —      |
| Tempering                                             | 550 °C                 | —      |
| Annealing                                             | Temperature not stated | —      |
| source joins the operations with + / procedural order |                        |        |
| Quenching                                             | Temperature not stated | —      |
| Tempering                                             | Temperature not stated | —      |
| Annealing                                             | Temperature not stated | —      |

## Designations across standards

49 designations · 4 documented as identical

|                                           |          |                                              |        |
|-------------------------------------------|----------|----------------------------------------------|--------|
| <b>France</b>                             | 12       | <b>Russia / CIS</b>                          | 4      |
| 06-05-05-04-02                            | afnor    | R6M5K5                                       | gost   |
| 6-5-2-5                                   | afnor    | R6M5K5-MP                                    | gost   |
| HS6-5-2-5                                 | afnor    | ДИ101-МП                                     | gost   |
| HS6-5-2-5HC                               | afnor    | P6M5K5                                       | gost   |
| HS6-5-2HC                                 | afnor    |                                              |        |
| Z85WDKCV                                  | afnor    | <b>Europe</b>                                | 3      |
| Z85WDKCV06                                | afnor    | 1.3243                                       | din-en |
| Z85WDKCV06-05-04-02                       | afnor    | HS6-5-2-5 <span>This grade's own name</span> | din-en |
| Z85WDKCV06-05-04-02-05                    | afnor    | S 6-5-2-5 <span>This grade's own name</span> | din-en |
| Z85WDKCV06-05-05-04-02                    | afnor    |                                              |        |
| Z90WDKCV                                  | afnor    | <b>United Kingdom</b>                        | 2      |
| Z90WDKCV06-05-05-04-02                    | afnor    | 3243                                         | bs     |
|                                           |          | BM35                                         | bs     |
| <b>United States</b>                      | 6        | <b>China</b>                                 | 2      |
| T11335                                    | uns      | N029                                         | gb     |
| T11341                                    | uns      | W6Mo5Cr4V2Co5                                | gb     |
| M35                                       | aisi-sae |                                              |        |
| M41                                       | aisi-sae | <b>Sweden</b>                                | 2      |
| SIL 10 <span>This grade's own name</span> | aisi-sae | 2723                                         | ss     |
| T11341                                    | aisi-sae | 2733                                         | ss     |
| <b>Spain</b>                              | 5        | <b>Bulgaria</b>                              | 2      |
| 6-5-2-5                                   | une      | HS6-5-2-5                                    | bds    |
| EM35                                      | une      | R6M5K5                                       | bds    |
| F.5607                                    | une      |                                              |        |
| F.5613                                    | une      |                                              |        |
| HS6-5-2-5                                 | une      |                                              |        |

|                      |       |                    |                          |
|----------------------|-------|--------------------|--------------------------|
| <b>Austria</b>       | 2     | <b>Slovakia</b>    | 1                        |
| BOHLERS705           | onorm | 19 852             | stn                      |
| S705                 | onorm |                    |                          |
| <b>International</b> | 1     | <b>Serbia</b>      | 1                        |
| HS6-5-2-5            | iso   | Č.9780             | srps                     |
| <b>Japan</b>         | 1     | <b>Poland</b>      | 1                        |
| SKH55                | jis   | SK5M               | pn                       |
| <b>Italy</b>         | 1     | <b>Hungary</b>     | 1                        |
| HS6-5-2-5            | uni   | R8                 | msz                      |
| <b>Czechia</b>       | 1     | <b>South Korea</b> | 1                        |
| 19852                | csn   | SKH55              | This grade's own name ks |

**Note on use.** The data is compiled to the best of our knowledge from publicly available standards and manufacturer documentation. It replaces neither material testing nor an inspection document to EN 10204. Please request a mill certificate to EN 10204 2.1, 3.1 or 3.2 together with your enquiry. The standard in its current valid edition always prevails.

### Enquiry about 2723

Quotation, availability, mill certificate or a technical question — directly on the material page.

[Start an enquiry](#)

#### DATASHEET ONLINE

[View the material page](#)

#### GRADE SEARCH

[Search all grades](#)

#### MATERIAL NO.

1.3243

#### ISSUED

Aug 20, 2026